

AIR RESERVOIRS aluminium




**LIGHT AND RUSTPROOF,
FOR A RELIABLE
PNEUMATIC
SYSTEM**



SMA aluminium air reservoirs for motor-vehicles and trailers are manufactured in accordance with the European Directive 87/404/EC, and with the standard EN 286/2.

Maximum pressure: 10/12/14 Bar. Air reservoirs are supplied with thread cover caps.

SMA can supply customized air reservoirs for other sectors too, in accordance with European and American standards (ASME code).

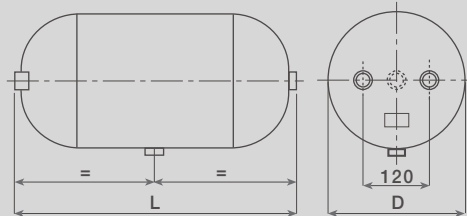


Air reservoirs with 4 bosses M22x1,5

Lt.	D	L	(Kg)	CODE
5	154	356	1,8	4A1550053
10	206	370	2,4	4A2060104
10	246	290	2,3	4A2460104
15	206	533	3,2	4A2060154
20	206	697	4,1	4A2060204
20	246	510	3,7	4A2460204
25	246	615	4,3	4A2460254
25	276	504	4,1	4A2760254
30	206	1000	5,7	4A2060304
30	246	730	5,0	4A2460304
30	276	591	4,7	4A2760304
30	296	521	4,6	4A2960304
40	206	1353	7,4	4A2060404
40	246	945	6,4	4A2460404
40	276	766	5,9	4A2760404
40	296	671	5,7	4A2960404
40	310	629	5,6	4A3100404
60	276	1111	8,3	4A2760604
60	296	965	7,8	4A2960604
60	310	907	7,7	4A3100604
60	396	583	6,9	4A3960604
80	296	1275	10,2	4A2960804
80	310	1175	9,7	4A3100804
80	396	748	8,6	4A3960804
100	396	913	10,2	4A3961004
120	396	1074	11,8	4A3961204



COMPLETE SUPPORT for air reservoirs

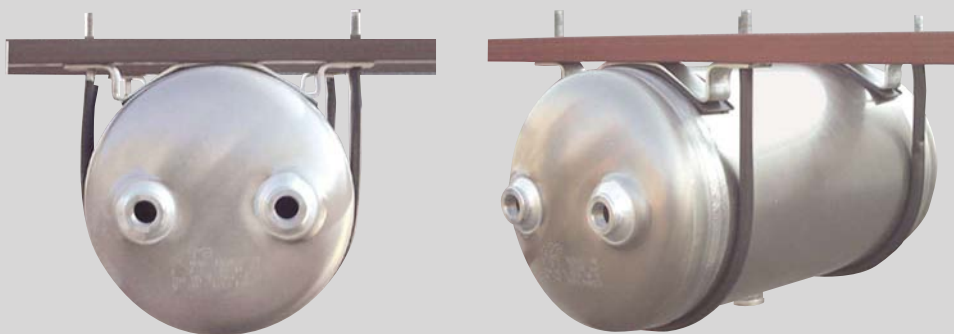

**HEAVY-DUTY, EFFICIENT, RUST-RESISTANT,
EASY TO ASSEMBLE**

The complete support is composed of: a cradle, rod, nuts with washers, sheathing and strap. The ideal solution for aluminium air reservoirs.

Diameter (mm)	Code			
206	9863	cradle	galvanized steel	thickness 4 mm
246	9864	rod	galvanized steel	diam. 9 mm
276	9865	nut	galvanized steel	M 10
296	9866	washer	galvanized steel	10,5x21
310	9867	sheathing	rubber	-
360	9868	strap	rubber	-
396	9869			

AIR RESERVOIRS WITH WELDED SUPPORTS



SMA can design, manufacture and supply air reservoirs with welded supports for quick assembly and high safety.